

OCZ
2.5inch SATA2 SSD
(Solid State Drive)

Datasheet rev.A01

1. General Description

OCZ 2.5inch SSD(Solid State Drive) is based on standard Serial ATA interface. It uses highly reliable NAND Flash chips and its capacity can be up to 128GB. OCZ 2.5inch SSD can be a good solution in a notebook, portable device for a storage device with a high performance, high reliability, low power consumption and a small form factor.

2. Features

- Supports 1.5/3.0Gbps SATA I/II interface
- Fully compliant with Serial ATA International Organization: Serial ATA Revision 2.6
- Fully compliant with ATA/ATAPI-7 Standard
- Capacity:
2.5inch: 32GB / 64GB / 128GB
- Performance

Intel Core 2 Duo E6300 1.86GHz, South Bridge: Nvidia 680i, Main Memory Size 2GB DDR2 800MHz (5-5-5-12)

OS: Windows XP Pro SP2

MB: EVGA

ATTO Disk Bench				
Model P/N	READ (MB/s)		WRITE (MB/s)	
OCZSSD2-1C32G	144.839		92.044	
OCZSSD2-1C64G	132.888		89.587	
OCZSSD2-1C128G	120.41		86.642	
HD Bench 3.40 beta6				
File Size: 100MB				
Model P/N	Read (MB/s)	Write (MB/s)	R. Read (MB/s)	R. Write (MB/s)
OCZSSD2-1C32G	139.319	88.504	84.979	18.354
OCZSSD2-1C64G	128.32	86.195	78.89	17.567
OCZSSD2-1C128G	114.798	82.914	71.96	17.952

- High Reliability based on the internal BCH 10bit ECC
- Supports SMART (Self-Monitor Analysis and Reporting Technology)
- Data integrity under power-cycling
- MTBF > 1,500,000 Hours
- Shock
 - Operating: 1,500G. Duration 0.5ms, half sine wave
 - Vibration: 20G. Peak, 10 ~ 20KHz with 3 axis
- Humidity: 0C ~ 55°C / 95% RH, 10 cycles
- Temperature
 - Operating Temperature: -10°C ~ +70°C
 - Storage Temperature: -55°C ~ +140°C
- Fully compliant with RoHS directive
- CE and FCC compatibility

3. Pin Assignment and Description

	No.	Plug Connector pin definition		
Signal	S1	GND	2 nd mate	
	S2	A+	Differential signal A from PHY	
	S3	A-		
	S4	GND	2 nd mate	
	S5	B-	Differential signal B from PHY	
	S6	B+		
	S7	GND	2 nd mate	
Key and spacing separate signal and power segments				
Power	P1	V33	3.3V power (Unused)	
	P2	V33	3.3V power (Unused)	
	P3	V33	3.3V power, pre-charge, 2 nd mate (Unused)	
	P4	GND	1 st mate	
	P5	GND	2 nd mate	
	P6	GND	2 nd mate	
	P7	V5	5V power, pre-charge, 2 nd mate	
	P8	V5	5V power	
	P9	V5	5V power	
	P10	GND	2 nd mate	
	P11	DAS/DSS	Device Activity Signal / Disable Staggered Spinup	
	P12	GND	1 st mate	
	P13	V12	12V power, pre-charge, 2 nd mate (Unused)	
	P14	V12	12V power (Unused)	
	P15	V12	12V power (Unused)	

4. Electrical Specification

- Absolute Maximum Rating**

Parameter	Symbol	Condition	Min	Max	Unit
Analog Power Supply	AVDDH		-0.5	6	V
Digital I/O Power Supply	DVDD		-0.5	6	V
Digital I/O Input Voltage	$V_{I(D)}$		-0.4	DVDD + 0.4	V
Storage Temperature	$T_{storage}$		-55	140	°C

- Recommended Power Supply Operation Conditions**

Parameter	Symbol	Condition	Min	Typical	Max	Unit
Operation Digital Power Supply	DVDD		3	3.3	3.6	V
Operation Analog Power Supply	AVDDH		3	3.3	3.6	V
Ambient Operation Temperature	TA		-10		70	°C
Junction Temperature	TJ		-10		125	°C

- Recommended External Clock Source Conditions**

Parameter	Symbol	Condition	Min	Typical	Max	Unit
External Reference Clock				30		MHz
Clock Duty Cycle			45	50	55	%


- Power Supply DC Characteristics (IDLE)**

Parameter	Symbol	Condition	Min	Typical	Max	Unit
Digital I/O Power Supply	I_{DVDD}	3.3V		9		mA
Internal Digital Power Supply	I_{DDH_VR}	1.8V		88		mA
SATA Analog Power Supply	I_{AVDDH_SATA}	3.3V		41		mA
SATA Analog Power Supply	I_{AVDDH_SATA}	1.8V		87		mA

- I/O DC Characteristics**

Parameter	Symbol	Condition	Min	Typical	Max	Unit
Input Low Voltage	V_{IL}				0.8	V
Input High Voltage	V_{IH}		2.0			V
Output Low Voltage	V_{OL}		0		0.4	V
Output High Voltage	V_{OH}		2.6		3.6	V

5. Physical Dimensions (99.88mm x 69.63mm x 9.3mm) – mini USB PORT is optional.

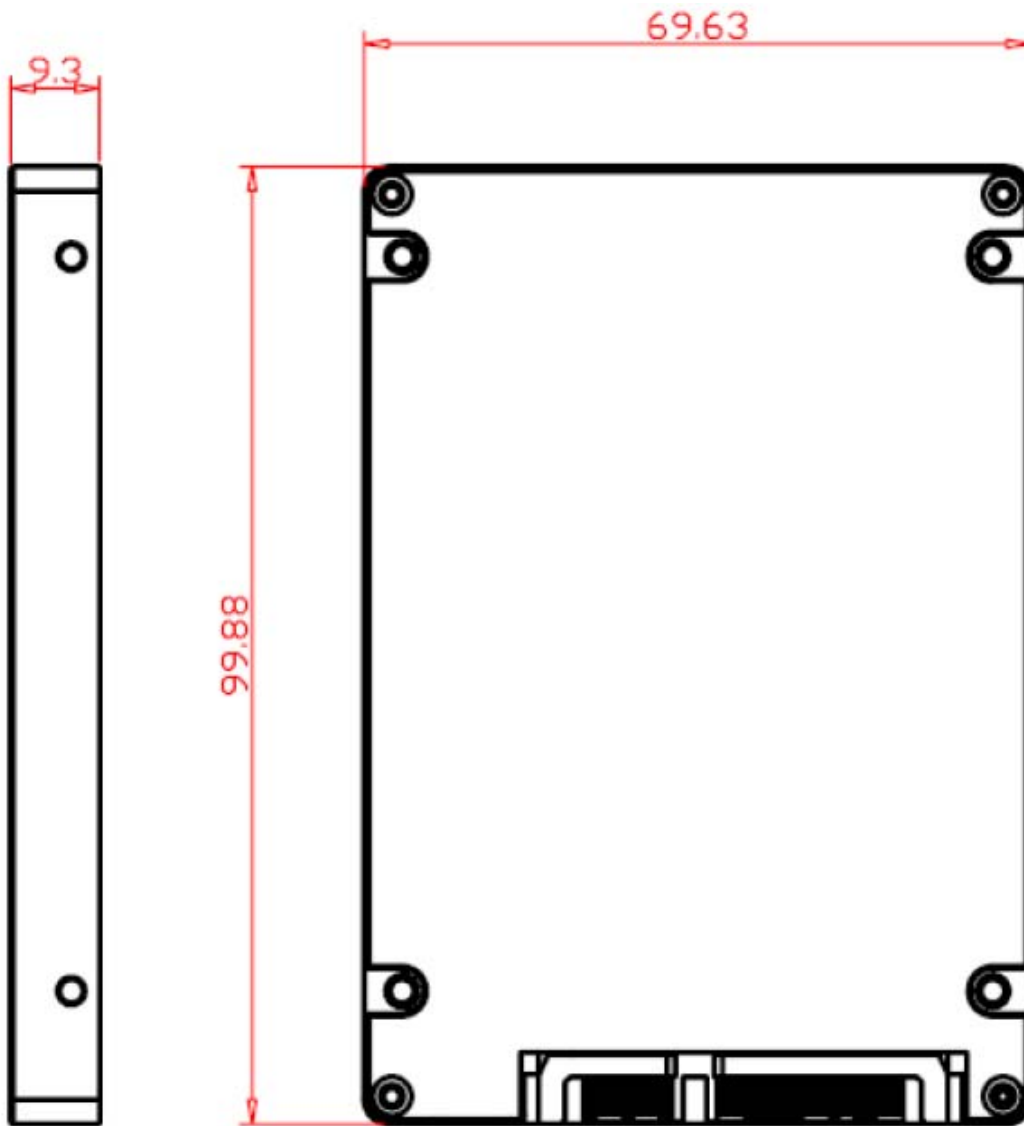

Mini USB PORT



6. Performance Testing Result

- TEST Platform:
 - Intel Core 2 Duo E6300 1.86GHz,
 - South Bridge: Nvidia 680i
 - Main Memory Size 2GB DDR2 800MHz (5-5-5-12)
 - OS: XP Pro SP2
 - M/B: EVGA nForce 680i-SLI

- No RAID

ATTO Disk Bench		
Model P/N	READ (MB/s)	WRITE (MB/s)
OCZSSD2-1C32G	144.839	92.044
OCZSSD2-1C64G	132.888	89.587
OCZSSD2-1C128G	120.41	86.642

HD Bench 3.40 beta6 File Size: 100MB				
Model P/N	Read (MB/s)	Write (MB/s)	R. Read (MB/s)	R. Write (MB/s)
OCZSSD2-1C32G	139.319	88.504	84.979	18.354
OCZSSD2-1C64G	128.32	86.195	78.89	17.567
OCZSSD2-1C128G	114.798	82.914	71.96	17.952

IO METER IOPs				
Test Size	READ 4KB	WRITE 4KB	READ 32KB	WRITE 32KB
OCZSSD2-1C32G	2742	513	1875	544
OCZSSD2-1C64G	2499	493	1503	509
OCZSSD2-1C128G	2311	470	1577	510

- RAID0 (x2) - To have the right configuration of RAID, you **MUST have the bundled diskette** from the mother board manufacturer or OEM manufacturer.

ATTO Disk Bench RAID0 (x2)		
Model P/N	READ (MB/s)	WRITE (MB/s)
OCZSSD2-1C64G	229.712	166.523
OCZSSD2-1C128G	240.861	174.416

HD Bench 3.40 beta6 RAID0 (x2), File Size: 100MB				
Model P/N	Read (MB/s)	Write (MB/s)	R. Read (MB/s)	R. Write (MB/s)
OCZSSD2-1C64G	218.336	152.154	90.941	18.882
OCZSSD2-1C128G	229.854	163.578	94.902	19.441

IO METER IOPs RAID0 (x2)				
Test Size	READ 4KB	WRITE 4KB	READ 32KB	WRITE 32KB
OCZSSD2-1C64G	2492	497	2181	491
OCZSSD2-1C128G	2218	509	1923	497

7. Revision History:

Revision	History	Date	Memo
A01	First Release	7/15/2008	

8. Contact:

- Please contact OCZ website for the updated SPECSHEET.
 - <http://www.ocztechnology.com>
- Please contact OCZ Tech Support Team for further questions.
 - <http://www.ocztechnology.com/NewTicket.html>